
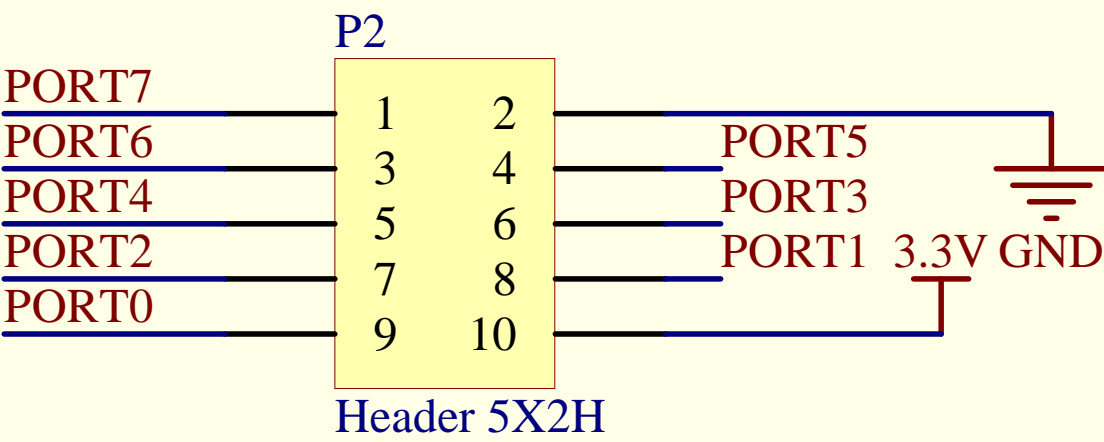


HE10 connector, pas 2.54mm

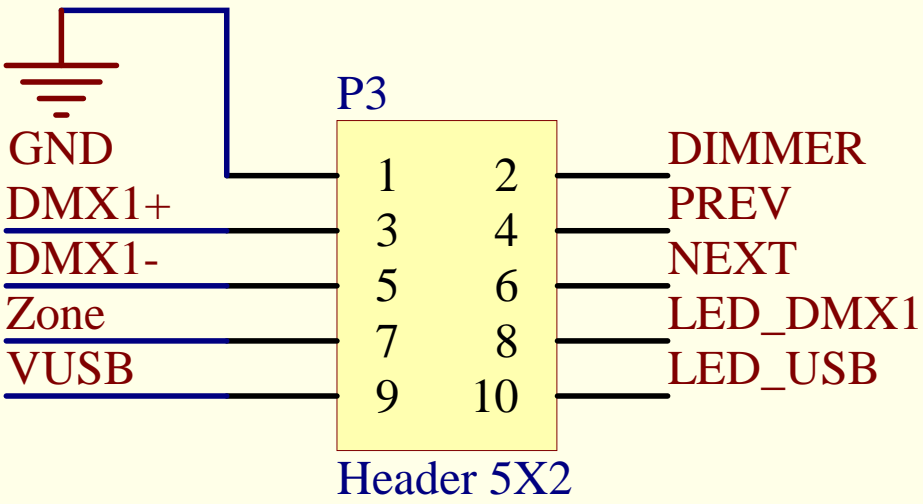


MULTI XLR

(for XLR1 only)

Please mount the following resistor:


- XLR 3 male: RSBx + RSDx
- XLR 5 male: RSDx
- XLR 3 female: nothing to mount
- XLR 5 female: RSAx + RSCx

Leds connector step 1.27

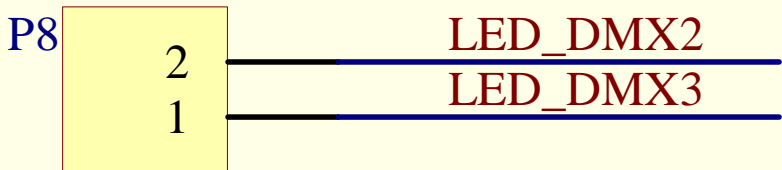

DMX Universe 3 isn't avaible on SIUDI8


DMX connectors step 2.54mm

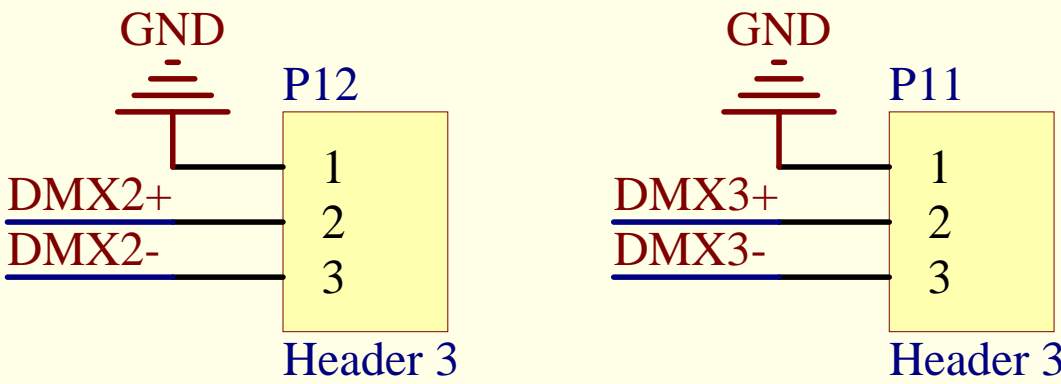

Dmx 2 connector is only available on SIUDI7 and SIUDI8 above version 1.2

Universe 3 isn't avaible on SIUDI8

Battery

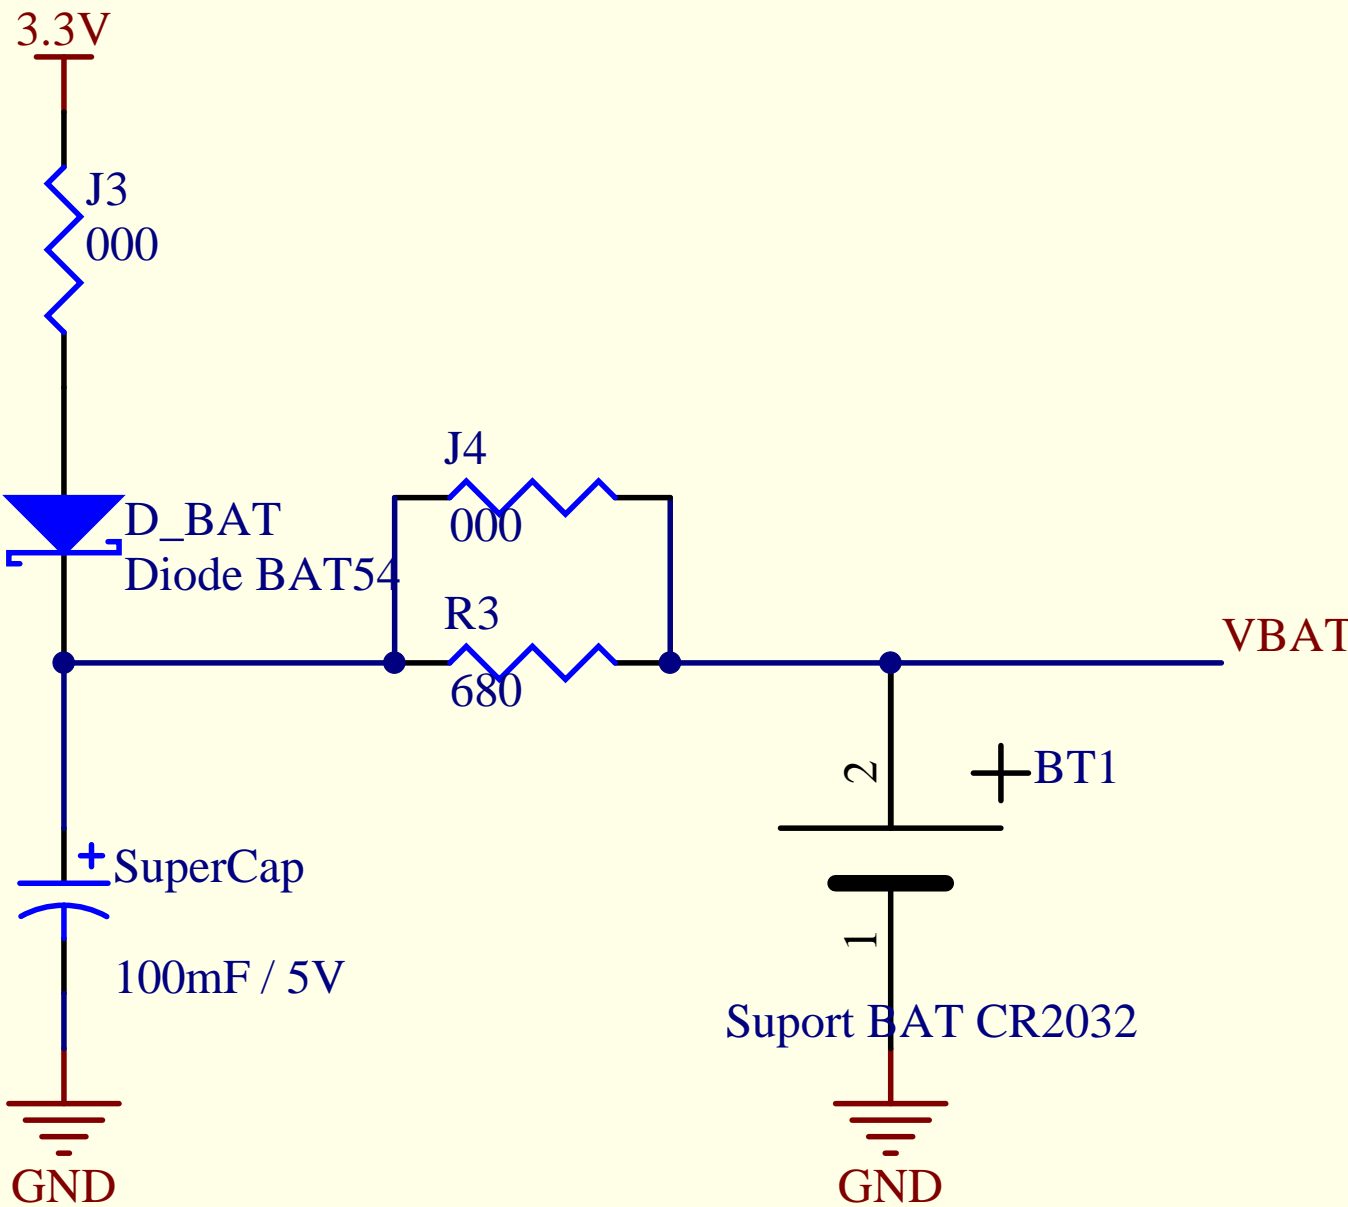

SUIDI7 / SIUDI8 battery can be based on Super Cap or (exclusive) CR2032 or (exclusive) LIR2032

by default the battery is a LIR2032 for SIUDI7
by default the battery is a CR2032 for SIUDI8

Title <i>SIUDI7 SIUDI8 Documentation</i>			LightingSoft AG Heissackerweg 8 CH-4513 Langendorf (SO) Switzerland CH-270.3.013.442-8
Size: A4	Number: 1	Revision: 1.2	
Date: 26/10/2010	Time: 09:04:47	Sheet of	
File: D:\Documents_HARDWARE\Documentation\Documentation SIUDI7-SIUDI8.SchDoc			